

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0
info@process-informatik.de
<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Accessories
 - + Connector plug / equipment
 - + MPI- / Profibus connecting cable




QR-Code Website:



Please make sure to update your drivers before using our products.

Coupling of S5-PLC with S7-PLC via PD-interfaces

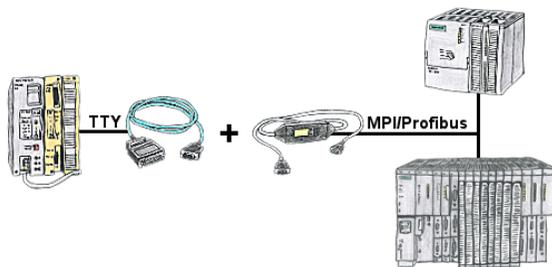


S5 in the machine-park, conversion to S7 not profitable, central-control still requires production-data, who does not know this problem.

With "S5anMPI" you connect the S5-PLC with a standard interface-cable with the MPI/PROFIBUS of a S7-PLC. Loading handling-blocks in both PLCs, communication integrated and "S5anMPI" exchanges DB-content on request of the respective PLC. Configuration in the "S5anMPI" which PLC is active, also both PLCs active is possible.

Data-exchange without much effort and the S5-PLC continues in the S7-combination as usual and does not have to be replaced.

Connecting S7-/S5-PLCs without head-station



Pair your S7 directly with your S5, thanks to the active PUT/GET in the S7-LAN no problem.

Each MPI/Profibus-CPU exchanges data directly without using a CP.

No head-control or changes in the S5-PLC needed.

Remote-maintenance Pilz-PLC



Remote-maintenance of a Pilz-controller with network-connection via secure VPN-tunnel of the TeleRouter

Wireless around the Mitsubishi-PLC



Move wirelessly around the Mitsubishi-PLC and communicate for example ONLINE in the status

BOSCH-CL <=> S7-TCPIP




Bring your BOSCH-CL control CL200 - CL400 into the network

Link the PLC with your production-data-acquisition or other Industry 4.0-applications

Communicate with the controller as if you were talking to an S7-PLC, but the data comes from the CL-PLC

Networking CL-controllers without much effort (set the IP-address to match your subnet in the module, nothing more)

Visualisation of your S7- PLC via COM-Port

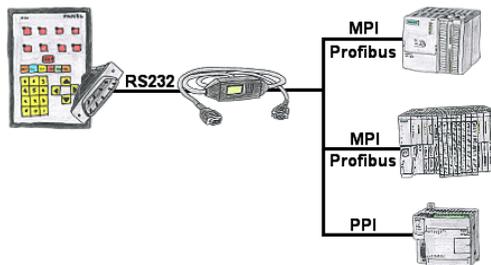

Your panel provides a serial port and no MPI/Profibus for connecting a S7-PLC. Connect the MPI/PPI-cable with it and you're Online with your panel.