

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

[info@process-informatik.de](mailto:info@process-informatik.de)

<https://www.process-informatik.de>

**Menutree Website:**

- + Products / docu / downloads
- + Accessories
  - + Connection cable / adapter
  - + RS232
  - + OP-programming cable




**QR-Code Website:**




Please make sure to update your drivers before using our products.

## S7-1200/1500 to S5




Coupling S7-controller with PN-port at S5-controller with PD-port via network

## PLC-coupling (data exchange between PLC-devices)

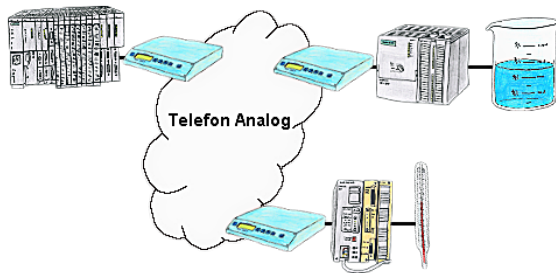


Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, a "normal" telephone connection is sufficient because the devices hangs up the line after occurred message.

## Data backup S7-PLC over MPI/Profibus on FTP-server via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via MPI/Profibus to FTP-server

## Take over control-tasks

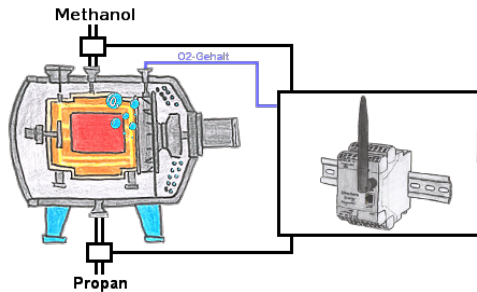


Capture with the Ethersens-device not only your process-values, you would be able to do control-tasks with the device.

## Serial communication with S5-PLC (CPU-assemblies 15pin)



S5-PLC communication from PC with serial COM-port and your programming package?  
 PG-Com-cable up to a length of 15m are the appropriate interface-product. Without special accessories, without external supply, plugged on PC and S5 PLC and work immediately. Connection with original Siemens-sliding-locking to S5-PLC, with screw-bolts on the PC. Function with S5-90U to S5-155U. Connection PLC-side 15pin, PC 9pin (adaptation to 25pin at any time possible).

## Data backup S7-PLC over MPI/Profibus on USB-stick



S7-PLC triggered DB-backup/-restore without additional PC via MPI/Profibus on USB-stick