

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.  
If you have questions or suggestions about the product, please don't hesitate to contact us.


Process-Informatik Entwicklungsgesellschaft mbH  
Im Gewerbegebiet 1  
DE-73116 Wäschenbeuren  
+49 (0) 7172-92666-0  
[info@process-informatik.de](mailto:info@process-informatik.de)  
<https://www.process-informatik.de>

**Menutree Website:**

- + Products / docu / downloads
- + Hardware
  - + Memory modules / Prommer
  - + EPROM-ERASER UVL3




**QR-Code Website:**




Please make sure to update your drivers before using our products.

## Data backup S7-PLC over MPI/Profibus on FTP-server via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via MPI/Profibus to FTP-server

## Process energy-data with LOGO!



Process of all kinds of the recorded energy-values with the LOGO!-Control

Separate your machine-net from the office-net

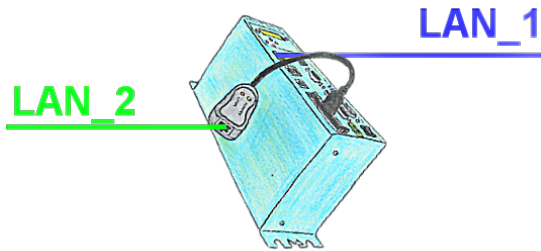


You need a separation between the machine-net and the office-net? No problem, plug a PCMCIA-LAN-card in your Tele-Prof-II-device (only for version -H) and the separation is OK. You have access to both nets via remote maintenance.

Remote-maintenance Pilz-PLC with firewall




Remote-maintenance of a Pilz-controller with network-connection via secure VPN-tunnel and scalable firewall

## Free definable limits

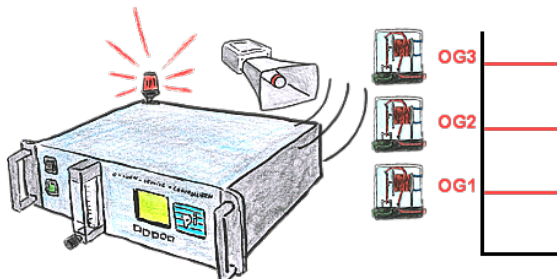

You need some limits? No problem, with the OSC-II-devices you will be able to define 3 relay outputs (toggle switch) like UG (down level) or OG (top level) or as a ready-flag (internal probe has working temperature).

## Protection of data areas in the PLC

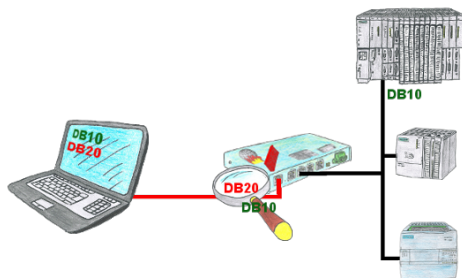

You have in your facility machinery with complex program structures and want to prevent that the users do not change comprehensible content? No problem, with the S7-firewall you can assign specific data fields to each user or even generally protect certain data areas in the PLC.