

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0
info@process-informatik.de
<https://www.process-informatik.de>

Menutree Website:


- + Products / docu / downloads
- + Hardware
- + PD-interface-multiplexer
- + T-Connector to PPI/MPI-Bus

QR-Code Website:



Please make sure to update your drivers before using our products.

Transformation of Rack/Slot in TSAP to MPI-address

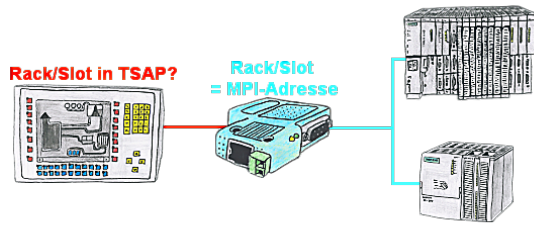

Your panel or visualisationsystem addresses the used PLC with Rack/Slot in TSAP? No problem, activate this mode in the S7-LAN and you will get actual data from the PLC.

Sending ASCII-data to a PC



Your car park or control sends the configuration/capacity utilisation to a PC with a modem, so that the data can be used for further processing.

Informations about the bus

S7-LAN V2.63
Kuehlhaus_1
IP:192.168.1.56

- Startseite
- Verbindungen
- Display
- Module
- Konfiguration
- Zugriffshilfe
- Parameter
- Newsfeed

RPC1006-Verbindungen - MPI

ID	IP-Adresse	Quali TSNP	Zust TSNP	CPU	Busstatus	Parasit
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0

Gateway-Verbindungen

ID: Kuehl-08 Empfängerstatus: Keine Gateway-Verbindung gefunden! Senderstatus:

Busknotenmatrix

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1																			
2																			
3																			
4																			
5																			
6																			
7																			
8																			
9																			
10																			
11																			
12																			
13																			
14																			
15																			
16																			
17																			
18																			
19																			

Zustand

Busknotenmatrix: verbunden

Busknoten: verbunden

Master-Submaster: 2 / 1


Modulbelegung: none

© Copyright 1997-2011

View information from the connected bus-system in plain text without using the Simatic-Manager or TIA-Portal. With the connection-menu you get the list of reachable nodes, marked in color whether it is an "active bus-participant", is a "candidate for inclusion in the bus" or a "passive bus-participant".

You can also see whether cyclic bus-parameter-protocols have been received, you are "in the bus" yourself, the bus-address of the participant recognized as a "direct participant" (on which the S7-LAN is located) and whether the contained modules such as "variable control", "gateway-coupling",... actively communicate.


Coupling ProfiNet to MPI/DP inclusive WIFI-interface



Wired or wireless communication (WIFI) via the same adapter with the respective control Devices from the BRIDGE-family always connect a wired-network with a wireless-network (WIFI) and a specific PLC-interface. This gives you access to the directly connected controller via WIFI (with S7 to the entire bus) as well as to the wired Ethernet. Of course also from wired Ethernet to WIFI and control/bus.


Always connected to each other, all made possible by the devices of the BRIDGE-family.

Data backup S5-PLC on FTP-server via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via PG-socket and Ethernet to FTP-server

Separate your machine-net from the office-net

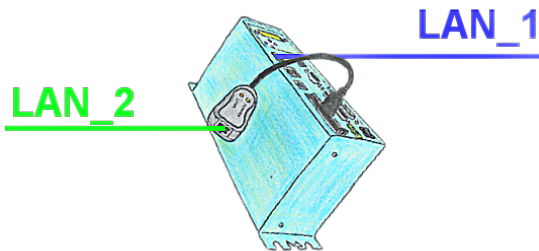

You need a separation between the machine-net and the office-net? No problem, plug a PCMCIA-LAN-card in your Tele-Prof-II-device (only for version -H) and the separation is OK. You have access to both nets via remote maintenance.